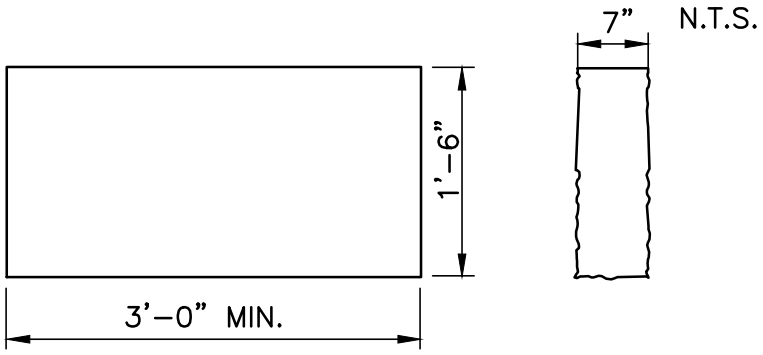

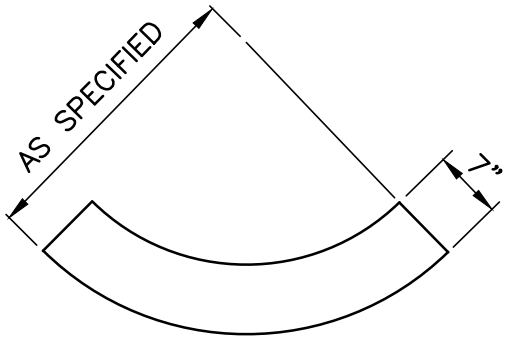

NOTE:

1. SHALL BE IN ACCORDANCE WITH SECTION 906 OF THE RI STANDARD SPECIFICATIONS.
2. TOP SURFACE TO BE DRESSED BY SAW. REMAINDER TO BE SAWCUT OR QUARRY SPLIT.
3. MINIMUM LENGTH OR CIRCULAR PIECES TO BE 3'–0".
4. CIRCULAR CURB IS REQUIRED ON CURVES AS INDICATED.
   STRAIGHT CURB TO BE USED ON CURVES OF MORE THAN 160'–0" RADIUS.
5. CURB TO BE SET PER PROVIDENCE CURB SETTING DETAIL.

GRANITE CURB - STRAIGHT AND CIRCULAR

N.T.S.

7.3.0 P
PROVIDENCE
STANDARD

ISSUE DATE: 1/6/17

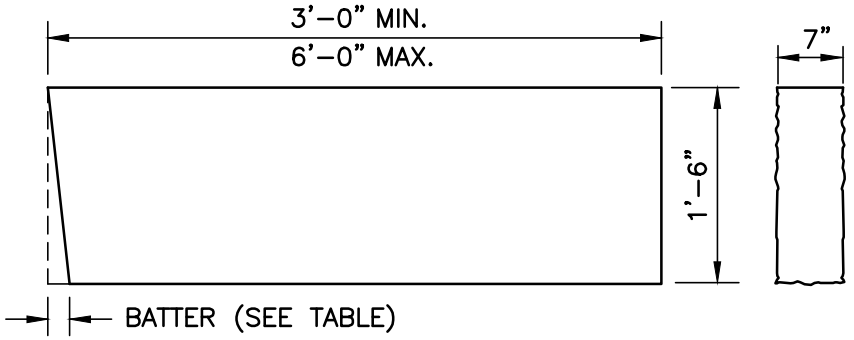

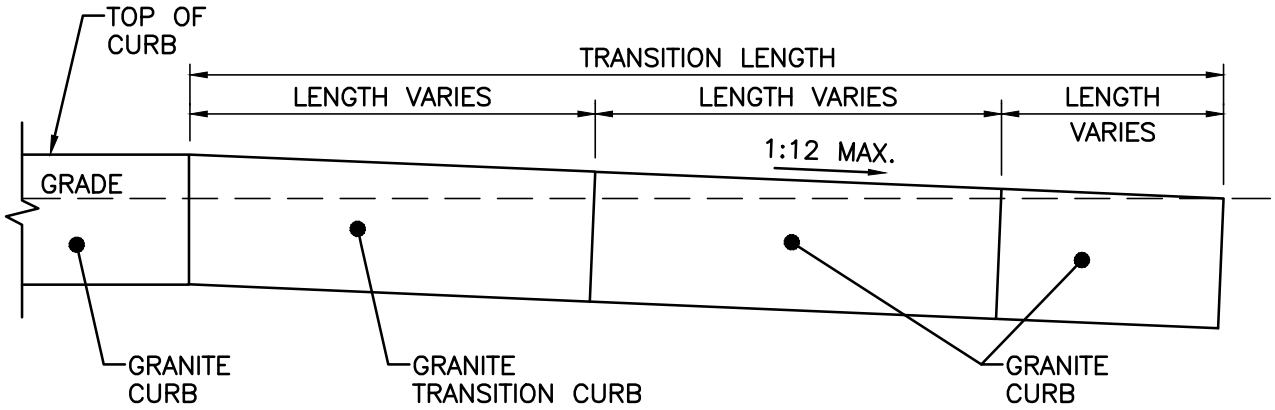

TRANSITION LENGTH (FT.)	BATTER (IN.)
6.0	1.5
7.0	1.3
8.0	1.2
9.5	1.0
11.5	0.8
15.0	0.6
18.0	0.5

NOTES:

1. SHALL BE IN ACCORDANCE WITH SECTION 906 OF THE R.I. STANDARD SPECIFICATIONS.
2. THE CONTRACTOR MAY CUT EXISTING CURB SECTIONS AS REQUIRED TO MEET THIS DETAIL AND THE R.I. STANDARD SPECIFICATIONS, WHERE OLD CURBING IS BEING REUSED.
3. MINIMUM LENGTH OF STRAIGHT OR CIRCULAR CURB FILLER PIECES TO BE 3'–0"(GREATER LENGTHS PREFERRED).
4. TOP SURFACE TO BE DRESSED BY SAW. REMAINDER TO BE SAWCUT OR QUARRY SPLIT.
5. CURB TO BE SET PER PROVIDENCE CURB SETTING DETAIL.

GRANITE WHEELCHAIR RAMP TRANSITION CURB

N.T.S.

7.3.3 P
PROVIDENCE
STANDARD

ISSUE DATE: 1/6/17

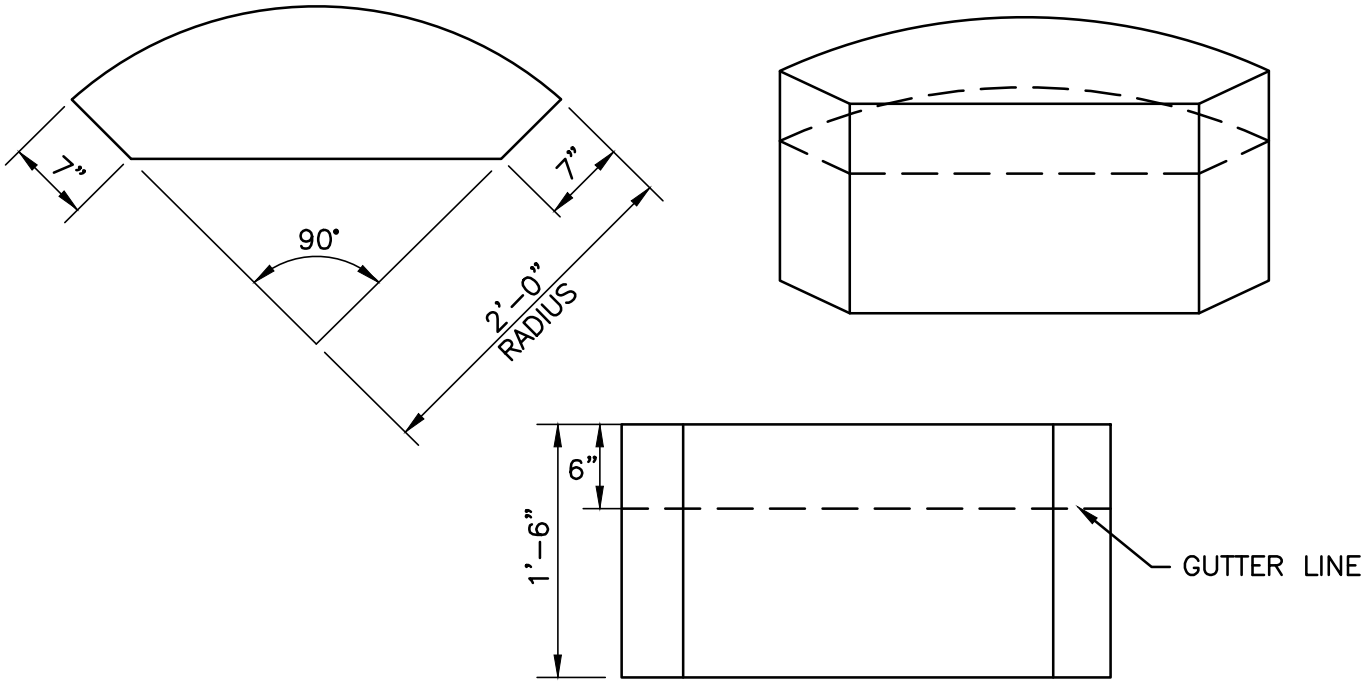

NOTES:

1. SHALL BE IN ACCORDANCE WITH SECTION 906 OF THE R.I. STANDARD SPECIFICATIONS.
2. TOP SURFACE TO BE DRESSED BY SAW. REMAINDER TO BE QUARRY SPLIT OR SAWCUT.

GRANITE 2'-0" RADIUS CURB RETURN

N.T.S.

7.3.4 P
PROVIDENCE
STANDARD

ISSUE DATE: 1/6/17

BACK SURFACE SHALL HAVE NO PROJECTIONS FOR A DISTANCE OF 3" DOWN FROM THE TOP UNLESS OTHERWISE SAWN

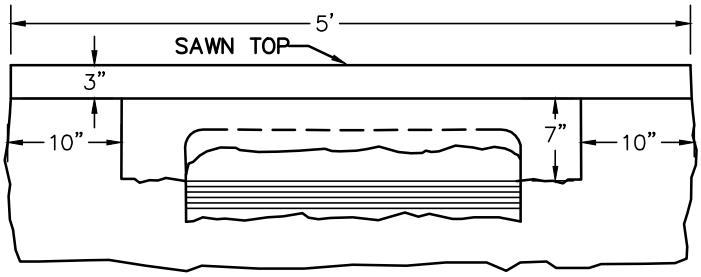

REAR VIEW
N.T.S.

QUARRY FACED WITH NO PORTIONS MORE THAN 1" ABOVE OR MORE THAN 1" BELOW A GENERAL PLANE, UNLESS OTHERWISE SAWN

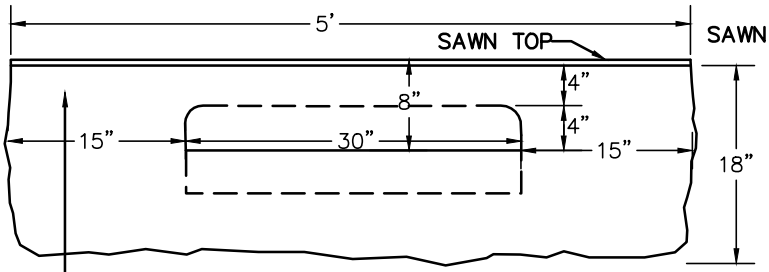

FRONT VIEW
N.T.S.

END OF ALL STONES SHALL BE SQUARE AND SO FINISHED THAT WHEN STONES ARE SET NO SPACE MORE THAN 1/4" SHALL SHOW IN THE JOINT FOR THE FULL WIDTH OF THE TOP OR DOWN THE FACE FOR 9," UNLESS OTHERWISE SAWN

LOWER HALF OF ENDS MAY BE QUARRY FACED WITH NO PROJECTIONS BEYOND DEPRESSED PORTION AND NO DEPRESSION MORE THAN 1" DEEP

FRONT FACE SHALL BE AT RIGHT ANGLES TO THE PLANE OF THE TOP AND SHALL BE SMOOTH QUARRY SPLIT, UNLESS OTHERWISE SAWN

FRONT FACE SHALL HAVE NO PROJECTION GREATER THAN 3/4" OR DEPRESSION GREATER THAN 1/2" FOR A DISTANCE DOWN FROM THE TOP OF 9", UNLESS OTHERWISE SAWN

GRANITE INLET STONE - 30" OPENING

N.T.S.

7.3.5 P
PROVIDENCE
STANDARD

ISSUE DATE: 1/6/17

BACK SURFACE SHALL HAVE NO PROJECTIONS FOR A DISTANCE OF 3" DOWN FROM THE TOP UNLESS OTHERWISE SAWN

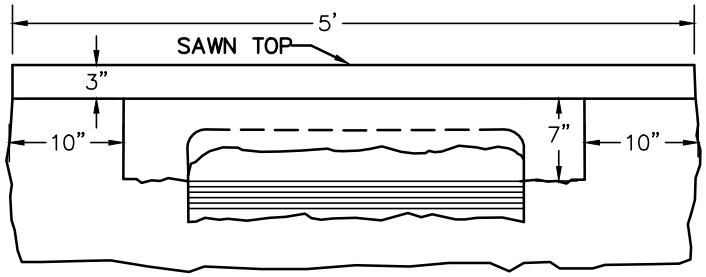

REAR VIEW
N.T.S.

QUARRY FACED WITH NO PORTIONS MORE THAN 1" ABOVE OR MORE THAN 1" BELOW A GENERAL PLANE, UNLESS OTHERWISE SAWN

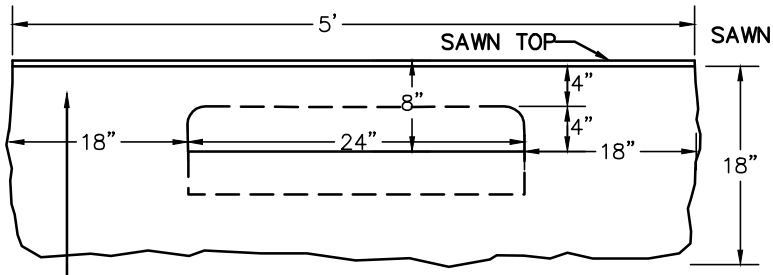

FRONT VIEW
N.T.S.

END OF ALL STONES SHALL BE SQUARE AND SO FINISHED THAT WHEN STONES ARE SET NO SPACE MORE THAN 1/4" SHALL SHOW IN THE JOINT FOR THE FULL WIDTH OF THE TOP OR DOWN THE FACE FOR 9," UNLESS OTHERWISE SAWN

LOWER HALF OF ENDS MAY BE QUARRY FACED WITH NO PROJECTIONS BEYOND DEPRESSED PORTION AND NO DEPRESSION MORE THAN 1" DEEP

FRONT FACE SHALL BE AT RIGHT ANGLES TO THE PLANE OF THE TOP AND SHALL BE SMOOTH QUARRY SPLIT, UNLESS OTHERWISE SAWN

FRONT FACE SHALL HAVE NO PROJECTION GREATER THAN 3/4" OR DEPRESSION GREATER THAN 1/2" FOR A DISTANCE DOWN FROM THE TOP OF 9", UNLESS OTHERWISE SAWN

GRANITE INLET STONE - 24" OPENING

N.T.S.

7.3.6 P
PROVIDENCE STANDARD

ISSUE DATE: 1/6/17

TOP SURFACE OF APRON OR REGULAR INLET STONE SHALL BE SAWN TO APPROXIMATELY TRUE PLANES TOP SURFACE SHALL HAVE NO PROJECTION OR DEPRESSION GRATER THAN 1/8".

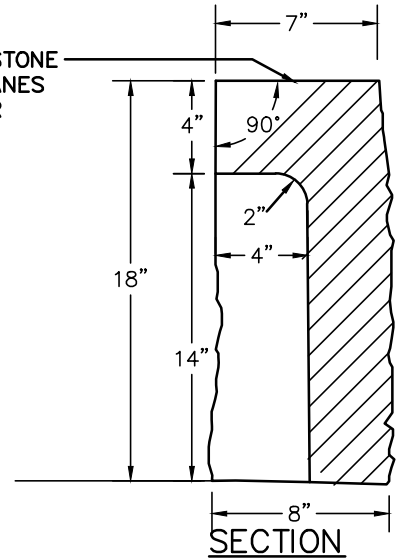

SECTION
N.T.S.

END OF ALL STONES SHALL BE SQUARE AND SO FINISHED THAT WHEN STONES ARE SET NO SPACE MORE THAN 1/4" SHALL SHOW IN THE JOINT FOR THE FULL WIDTH OF THE TOP OR DOWN THE FACE FOR 9"

QUARRY FACED WITH NO PORTIONS MORE THAN 1" ABOVE OR MORE THAN 1" BELOW A GENERAL PLANE, UNLESS OTHERWISE SAWN

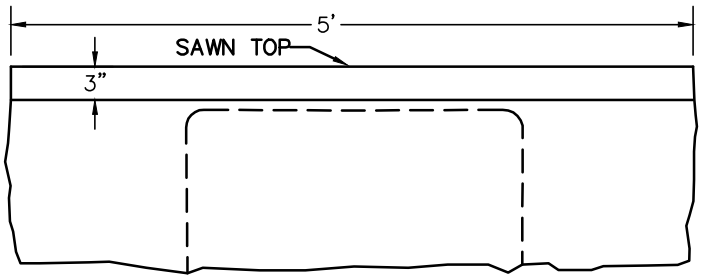

REAR VIEW
N.T.S.

FRONT FACE SHALL BE AT RIGHT ANGLES TO THE PLANE OF THE TOP AND SHALL BE SMOOTH QUARRYSPLIT UNLESS OTHERWISE SAWN

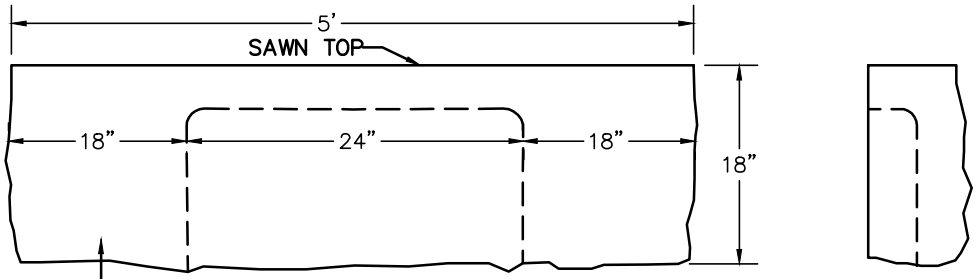

FRONT VIEW
N.T.S.

LOWER HALF OF ENDS MAY BE QUARRY FACED WITH NO PROJECTIONS BEYOND DEPRESSED PORTION AND NO DEPRESSION MORE THAN 1" DEEP

FRONT FACE SHALL HAVE NO PROJECTION GREATER THAN 3/4" OR DEPRESSION GREATER THAN 1/2" FOR A DISTANCE DOWN FROM THE TOP OF 9" UNLESS OTHERWISE SAWN

GRANITE APRON STONE - 24" OPENING

N.T.S.

7.3.7 P
PROVIDENCE STANDARD

ISSUE DATE: 1/6/17

TOP SURFACE OF APRON OR REGULAR INLET STONE SHALL BE SAWN TO APPROXIMATELY TRUE PLANES TOP SURFACE SHALL HAVE NO PROJECTION OR DEPRESSION GRATER THAN 1/8".

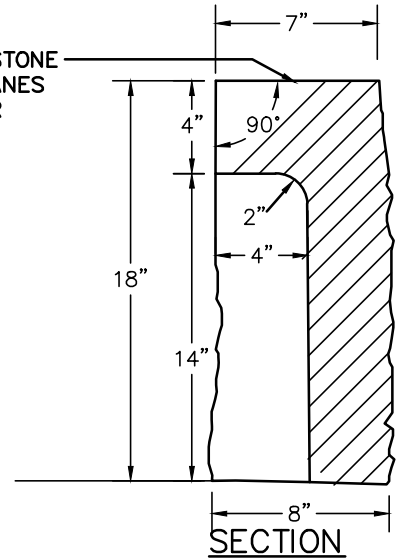

SECTION
N.T.S.

END OF ALL STONES SHALL BE SQUARE AND SO FINISHED THAT WHEN STONES ARE SET NO SPACE MORE THAN 1/4" SHALL SHOW IN THE JOINT FOR THE FULL WIDTH OF THE TOP OR DOWN THE FACE FOR 9"

QUARRY FACED WITH NO PORTIONS MORE THAN 1" ABOVE OR MORE THAN 1" BELOW A GENERAL PLANE, UNLESS OTHERWISE SAWN

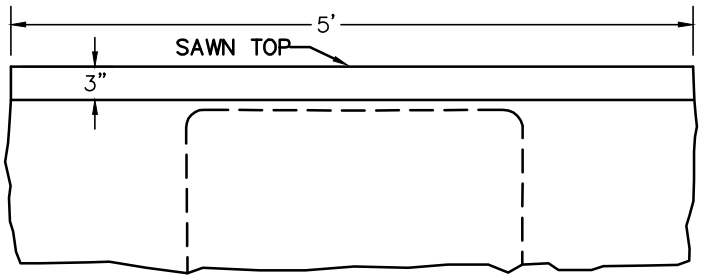

REAR VIEW
N.T.S.

FRONT FACE SHALL BE AT RIGHT ANGLES TO THE PLANE OF THE TOP AND SHALL BE SMOOTH QUARRYSPLIT UNLESS OTHERWISE SAWN

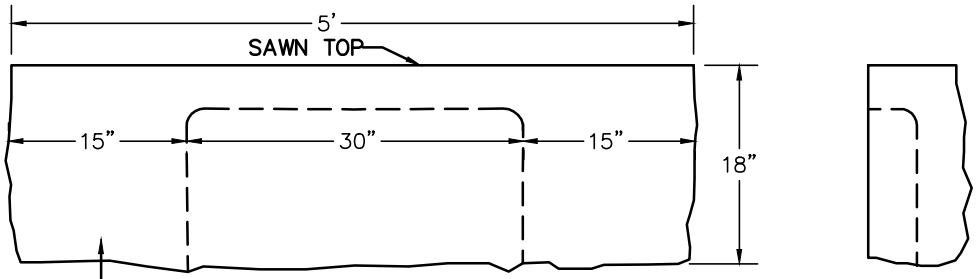

FRONT VIEW
N.T.S.

LOWER HALF OF ENDS MAY BE QUARRY FACED WITH NO PROJECTIONS BEYOND DEPRESSED PORTION AND NO DEPRESSION MORE THAN 1" DEEP

FRONT FACE SHALL HAVE NO PROJECTION GREATER THAN 3/4" OR DEPRESSION GREATER THAN 1/2" FOR A DISTANCE DOWN FROM THE TOP OF 9" UNLESS OTHERWISE SAWN

GRANITE APRON STONE - 30" OPENING

N.T.S.

7.3.8 P
PROVIDENCE STANDARD

ISSUE DATE: 1/6/17

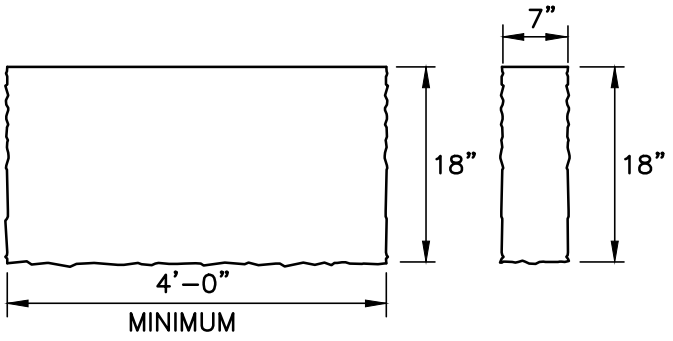

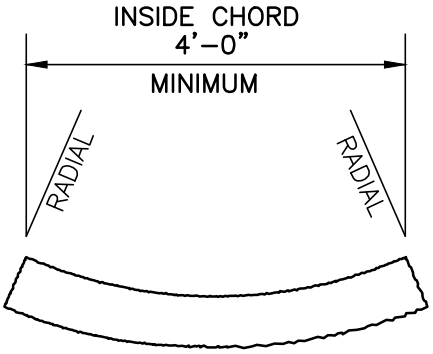

NOTES:

1. SHALL BE IN ACCORDANCE WITH SECTION 906 OF THE R.I. STANDARD SPECIFICATIONS.
2. TOP SURFACE TO BE DRESSED BY SAW TO PROVIDE NO–SLIP SURFACE; REMAINDER MAY BE QUARRY SPLIT.
3. MINIMUM LENGTH OF STRAIGHT OR CIRCULAR CURB FILLER PIECES TO BE 4'–0"
4. CIRCULAR RAMP STONE IS REQUIRED ON CURVES AS INDICATED. STRAIGHT RAMP STONE TO BE USED ON CURVES OF MORE THAN 160'–0" RADIUS.
5. RAMP STONE SHALL BE SET IN ACCORDANCE WITH PROVIDENCE CURB SETTING STANDARD.

GRANITE RAMP STONE

N.T.S.

7.3.9 P
PROVIDENCE
STANDARD

ISSUE DATE: 1/6/17

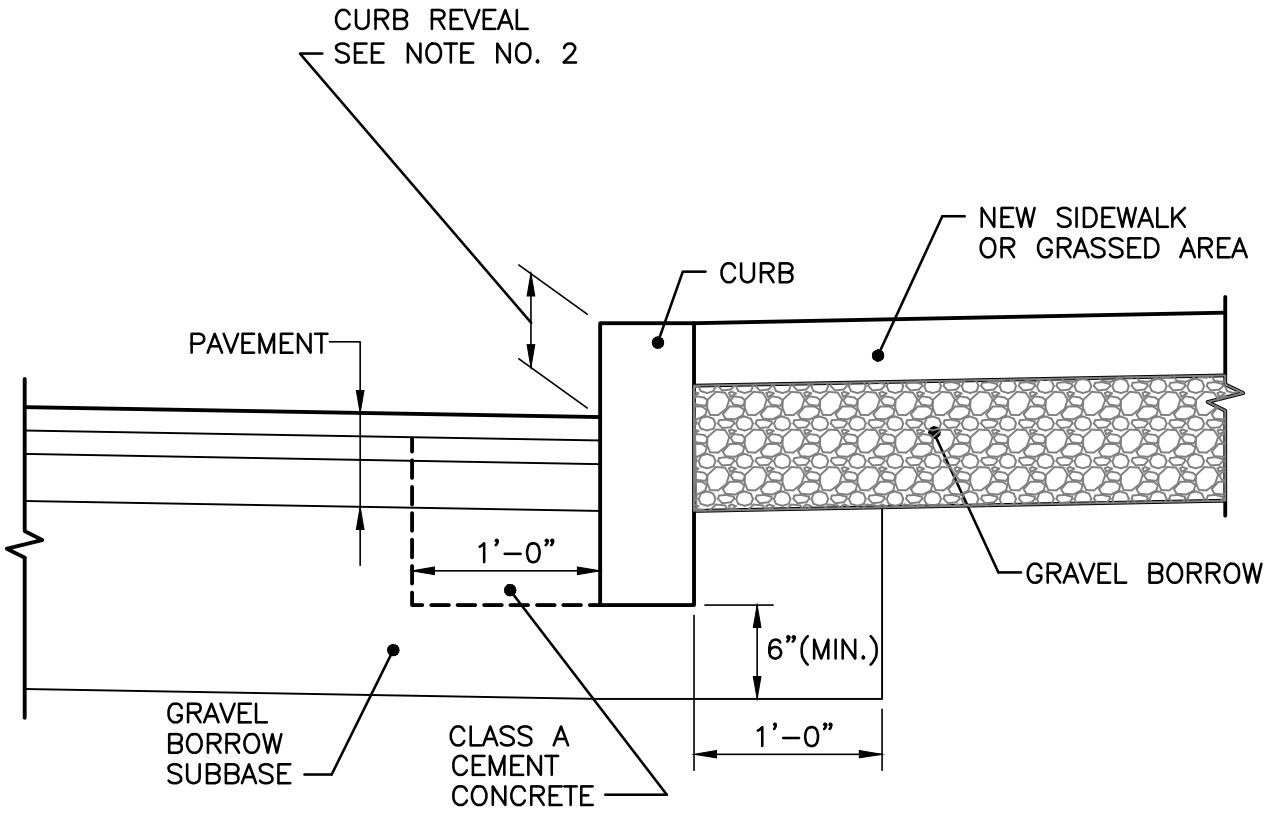

NOTES:

1. SHALL BE IN ACCORDANCE WITH SECTION 906 OF THE R.I. STANDARD SPECIFICATIONS.
2. NEW CURBING CONSTRUCTION SHALL BE SET AT A 6 INCH REVEAL OR AS INDICATED ON PLANS OR DIRECTED BY PROVIDENCE DPW. NEW CURBING INSTALLED ADJACENT TO EXISTING CURBING SHALL MATCH THE EXISTING REVEAL OR A MINIMUM OF 4 INCHES, WHICHEVER IS GREATER. IF ADJACENT EXISTING REVEAL IS LESS THAN 4 INCHES, THE FIRST SECTION OF NEW CURB SHALL TRANSITION TO 4" REVEAL,

CURB SETTING DETAIL

N.T.S.

7.6.0 P
PROVIDENCE
STANDARD

ISSUE DATE: 1/6/17